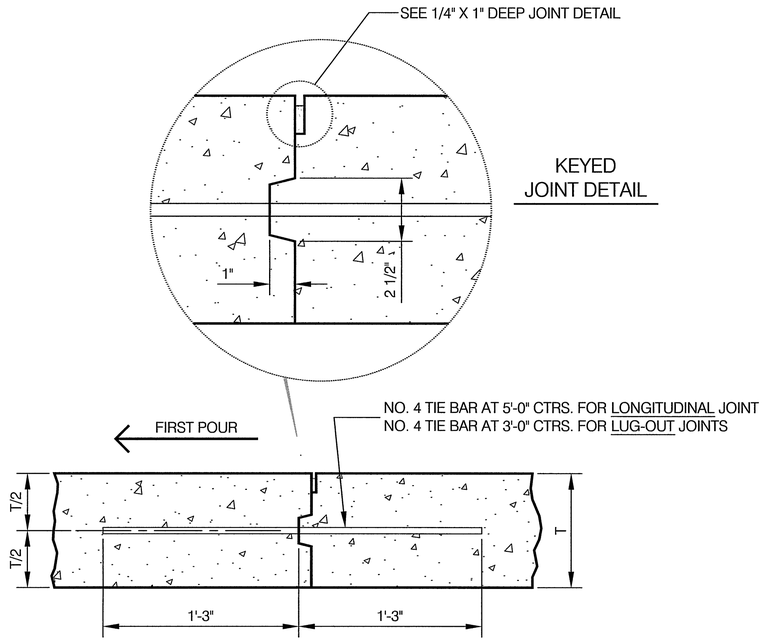

KEYED JOINT
LONGITUDINAL AND LUG-OUT TYPES

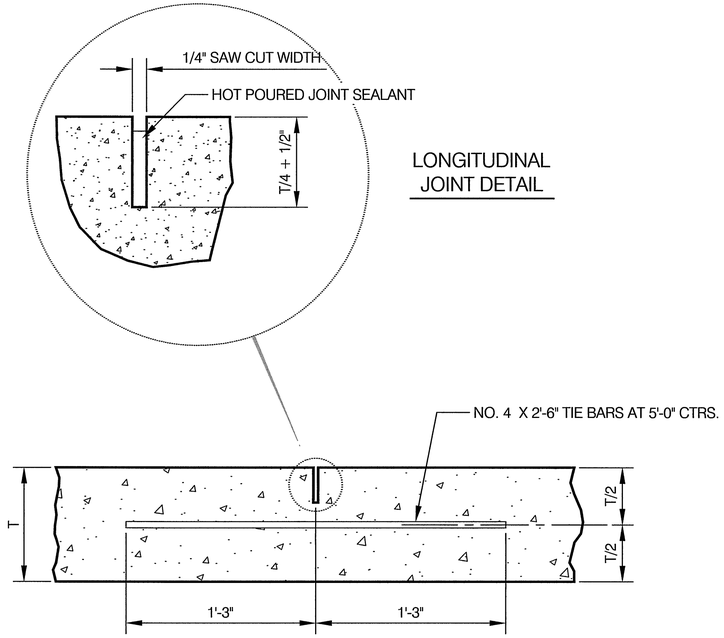

SAWED LONGITUDINAL JOINT

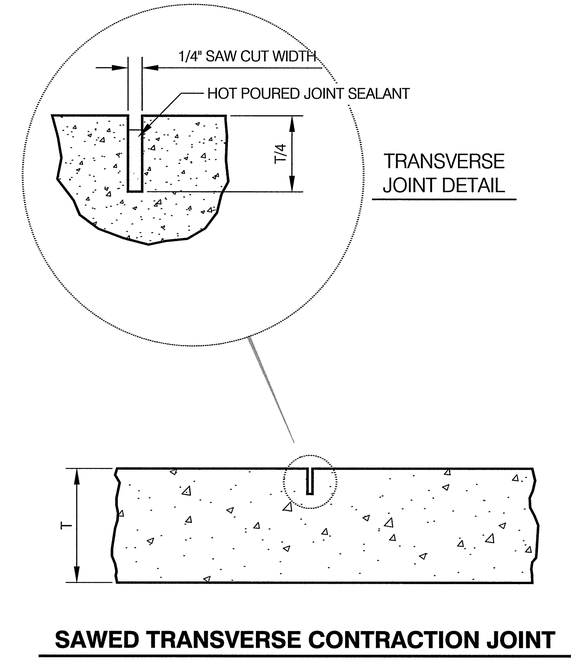

SAWED TRANSVERSE CONTRACTION JOINT

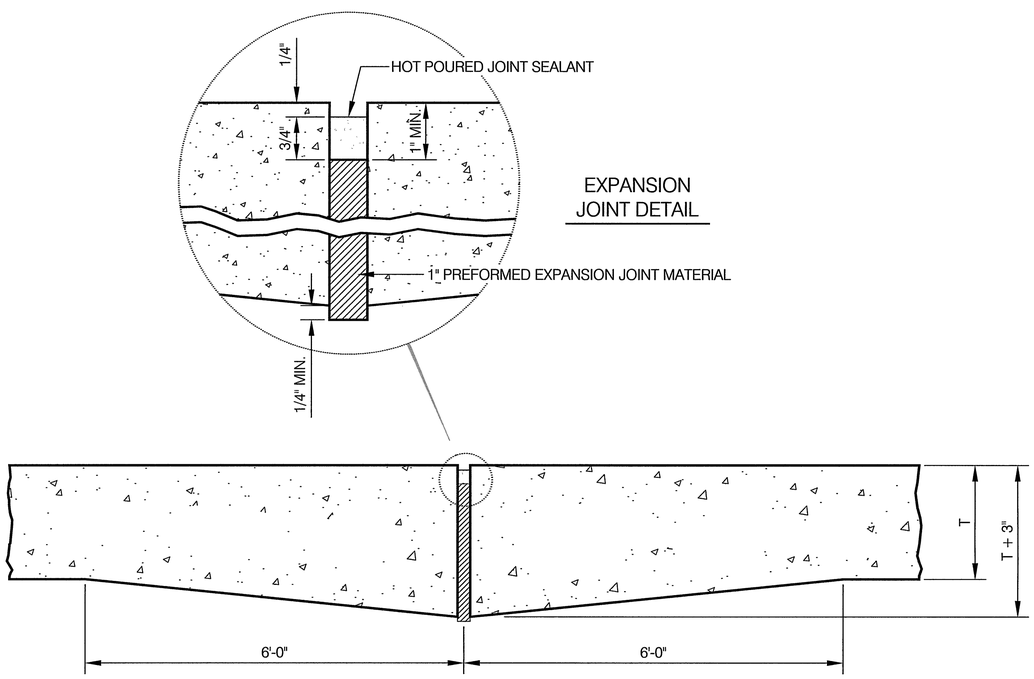

EXPANSION JOINT

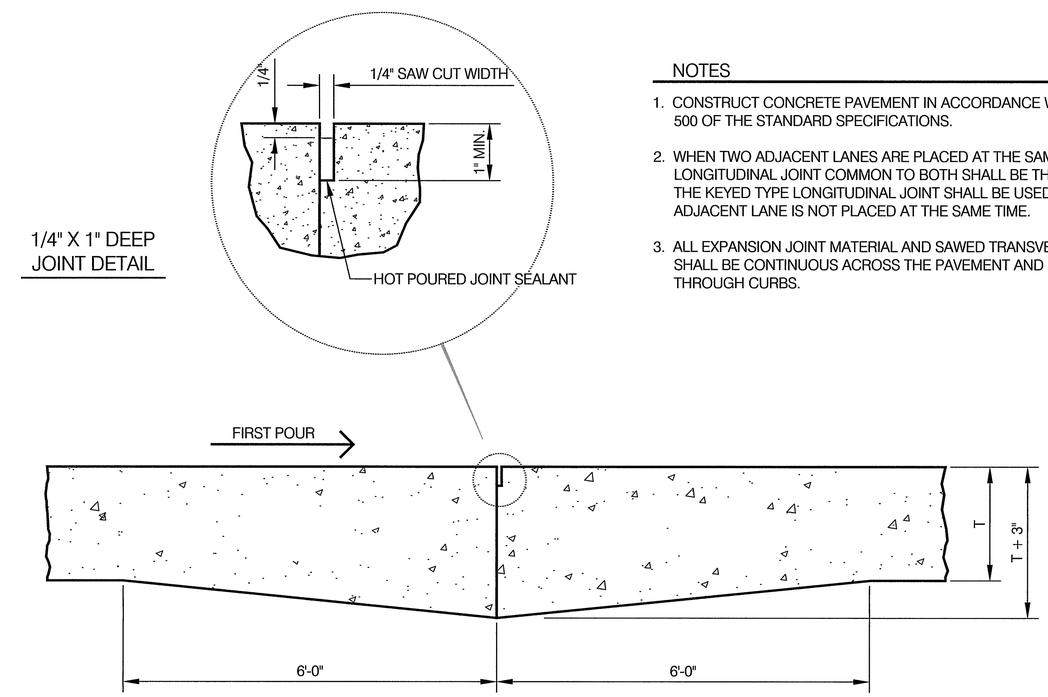

TRANSVERSE CONSTRUCTION JOINT

NOTES

1. CONSTRUCT CONCRETE PAVEMENT IN ACCORDANCE WITH SECTION 500 OF THE STANDARD SPECIFICATIONS.
2. WHEN TWO ADJACENT LANES ARE PLACED AT THE SAME TIME THE LONGITUDINAL JOINT COMMON TO BOTH SHALL BE THE SAWED TYPE. THE KEYED TYPE LONGITUDINAL JOINT SHALL BE USED WHEN AN ADJACENT LANE IS NOT PLACED AT THE SAME TIME.
3. ALL EXPANSION JOINT MATERIAL AND SAWED TRANSVERSE JOINTS SHALL BE CONTINUOUS ACROSS THE PAVEMENT AND EXTEND THROUGH CURBS.

DESIGN ENGINEER CITY ENGINEER	CITY OF OMAHA PUBLIC WORKS DEPARTMENT		
	CONCRETE PAVEMENT JOINT DETAILS	**STANDARD PLATE 1-50**	SHEET 1/1
		ISSUE DATE: ..... MARCH 26, 2003	