




RECONSTRUCTION TYPICAL SECTION

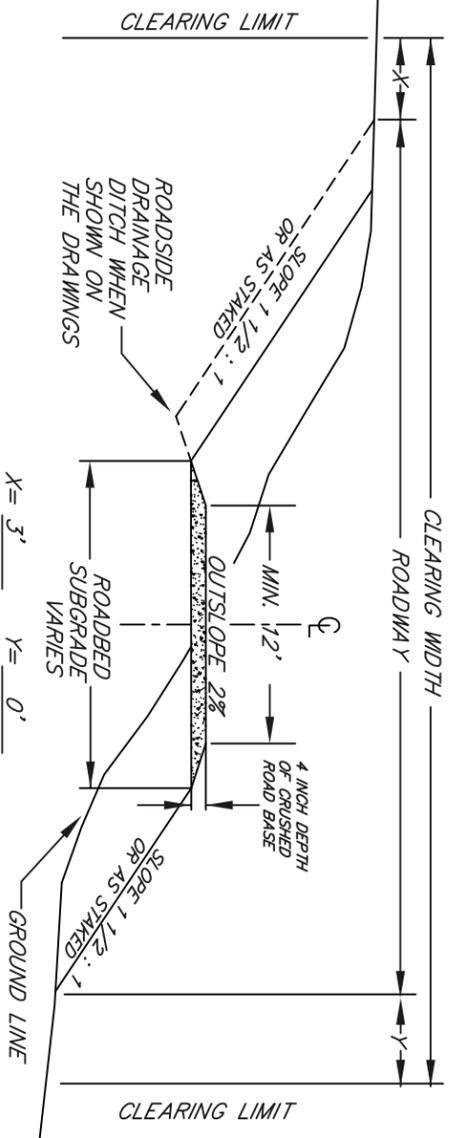


RECONSTRUCTION TYPICAL SECTION WITH AGGREGATE ROAD BASE

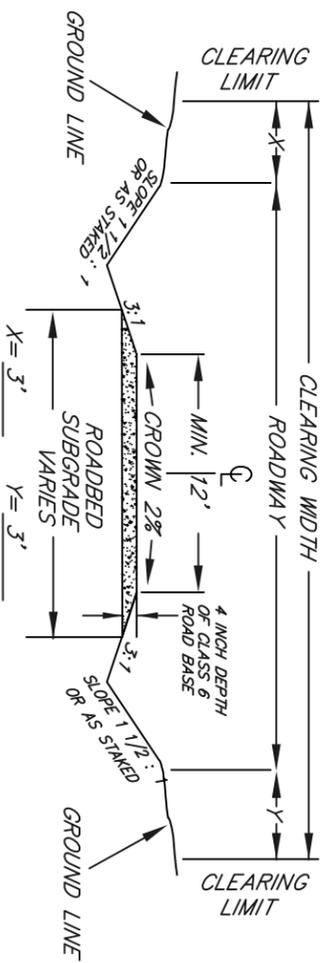


TURNPIKE TYPICAL SECTION WITH ROAD BASE SURFACING

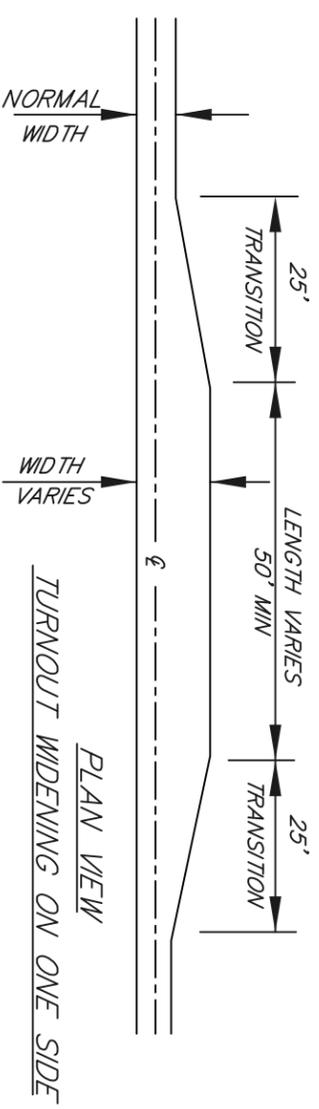


TURNOUT WIDENING ON ONE SIDE

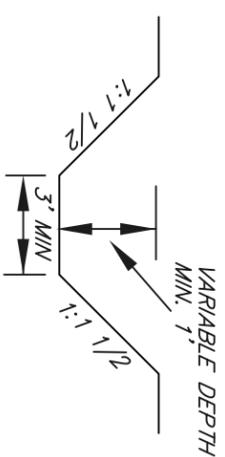

LEAD-OFF-DITCH DETAIL

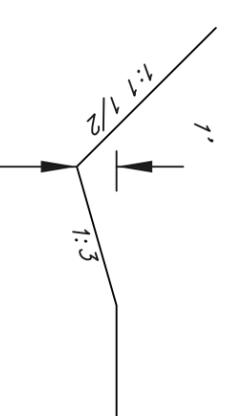

ROADSIDE DITCH DETAIL

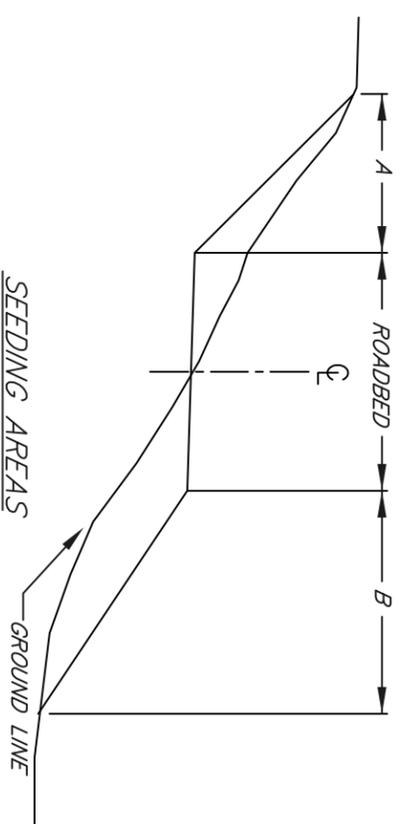

SEEDING AREAS

NOTES:

- 1 X & Y DENOTE CLEARING OUTSIDE OF ROADWAY FOR RECONSTRUCTION.
- 2 CLEARING HEIGHT SHALL BE 20' ABOVE EDGES OF ROADBED.
- 3 FOR RECONSTRUCTION - CLEARING SHALL BE 3' BEYOND THE TOP OF THE CUT AND TO THE TOE OF THE FILL OR 5' BEYOND EITHER EDGE OF THE ROADBED, WHICHEVER IS GREATER.
- 4 A & B DENOTE AREAS TO BE SEEDED. ALL DISTURBED AREAS SHALL BE SEEDED PRIOR TO ACCEPTANCE.
- 5 SLASH TREATMENT METHOD SHALL BE BY SCATTERING OUTSIDE THE CLEARING LIMITS.

Revisions		
No.	Date	By