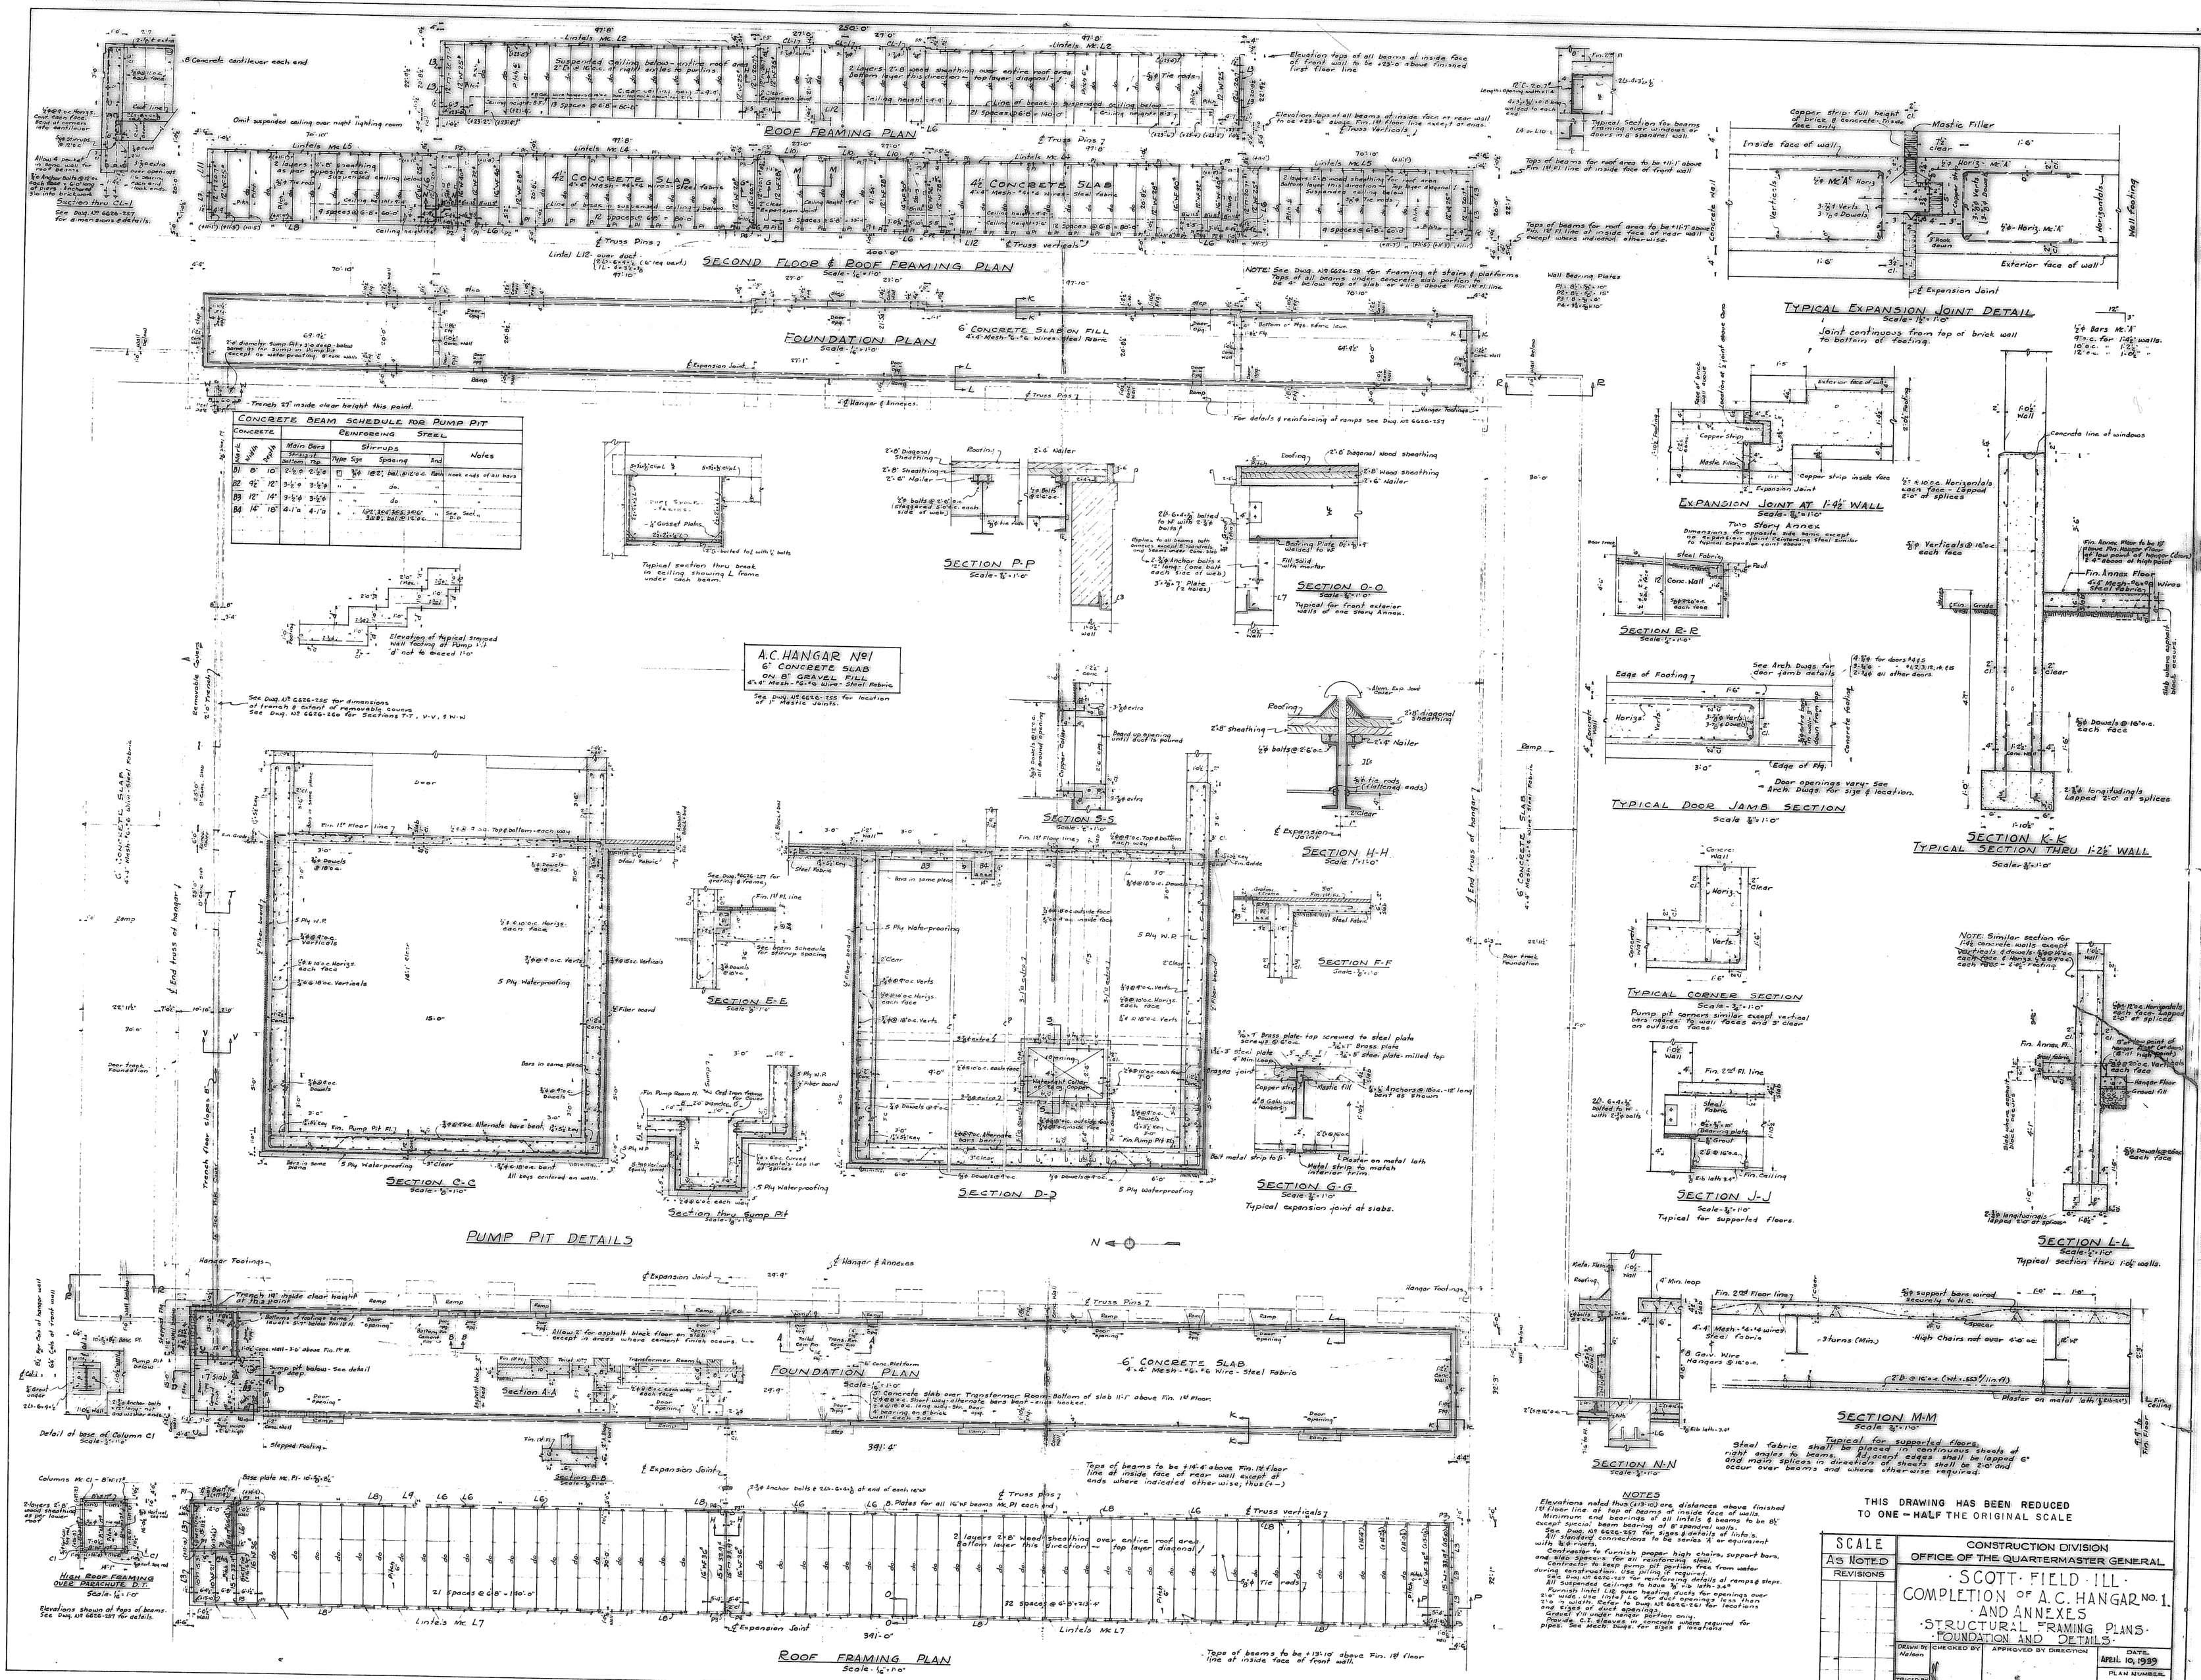

CONCRETE BEAM SCHEDULE FOR PUMP PIT							
CONCRETE			REINFORCING STEEL				
Mark	Width	Depth	Main Bars Straight Bottom	Main Bars Top	Stirrups Type	Stirrups Size	Stirrups Spacing	Stirrups End	Notes
B1	6"	10"	2-½"ø	2-½"ø	□	⅜"ø 18"2" bal. @12"o.c.		Each	Hook ends of all bars
B2	9½"	12"	3-½"ø	3-½"ø	"	do.		"	do.
B3	12"	14"	3-½"ø	3-½"ø	"	do.		"	do.
B4	14"	18"	4-1"ø	4-1"ø	"	1-1/2"x3/8"x3'-3"x6" 3/8"ø bal. @12"o.c.		"	See Sect. D-D