TYPICAL DEMOLITION NOTES

REMOVE ALL EXISTING ELECTRICAL MATERIALS AND ASSOCIATED ITEMS AS SHOWN OR NOTED ON THE DRAWINGS AND AS REQUIRED BY THE WORK.

- 2. REMOVE LIGHT FIXTURES AS SHOWN.
- 3. REMOVE RECEPTACLES, LIGHT SWITCHES AND DIMMERS AS
- 4. REMOVE ALL ABANDONED WIRING, CONDUIT, FITTINGS, ETC., IN THE PROJECT AREA. CAP ALL STUBS, AND SEAL PENETRATIONS THRU WALLS AND FLOORS.
- 5. ALL CONDITIONS SHALL BE CAREFULLY FIELD DETERMINED AND VERIFIED PRIOR TO REMOVAL.
- 6. PROVIDE A 2 WEEK NOTICE FOR ANY POWER DISTURBANCE.

## ELECTRICAL DEMOLITION NOTES (CONT)

- 7. INTERCEPT EXISTING CIRCUITS AND RE—ROUTE TO NEW EMERGENCY DISTRIBUTION PANEL. MINIMIZE DOWN TIME OF CIRCUITS AND COORDINATE SHUTDOWN WITH ANG.
- 8. UPDATE ALL PANEL SCHEDULES AFFECTED BY WORK.

## **ELECTRICAL KEYED NOTES:**

REMOVE FIXTURE & RE-INSTALL IN NEW CEILING GRID.

ELECTRICAL LEGEND - DEMOLITION

2' X 4' RECESSED FLUORESCENT TROFFER TO BE REMOVED

PENDANT MOUNTED FLUORESCENT FIXTURE TO BE REMOVED


RECEPTACLE TO BE REMOVED


EMERGENCY LIGHT FIXTURE TO BE REMOVED

LIGHT SWITCH TO BE REMOVED

DIMMER SWITCH TO BE REMOVED

SINGLE SPECIAL PURPOSE RECEPTACLE TO BE REMOVED

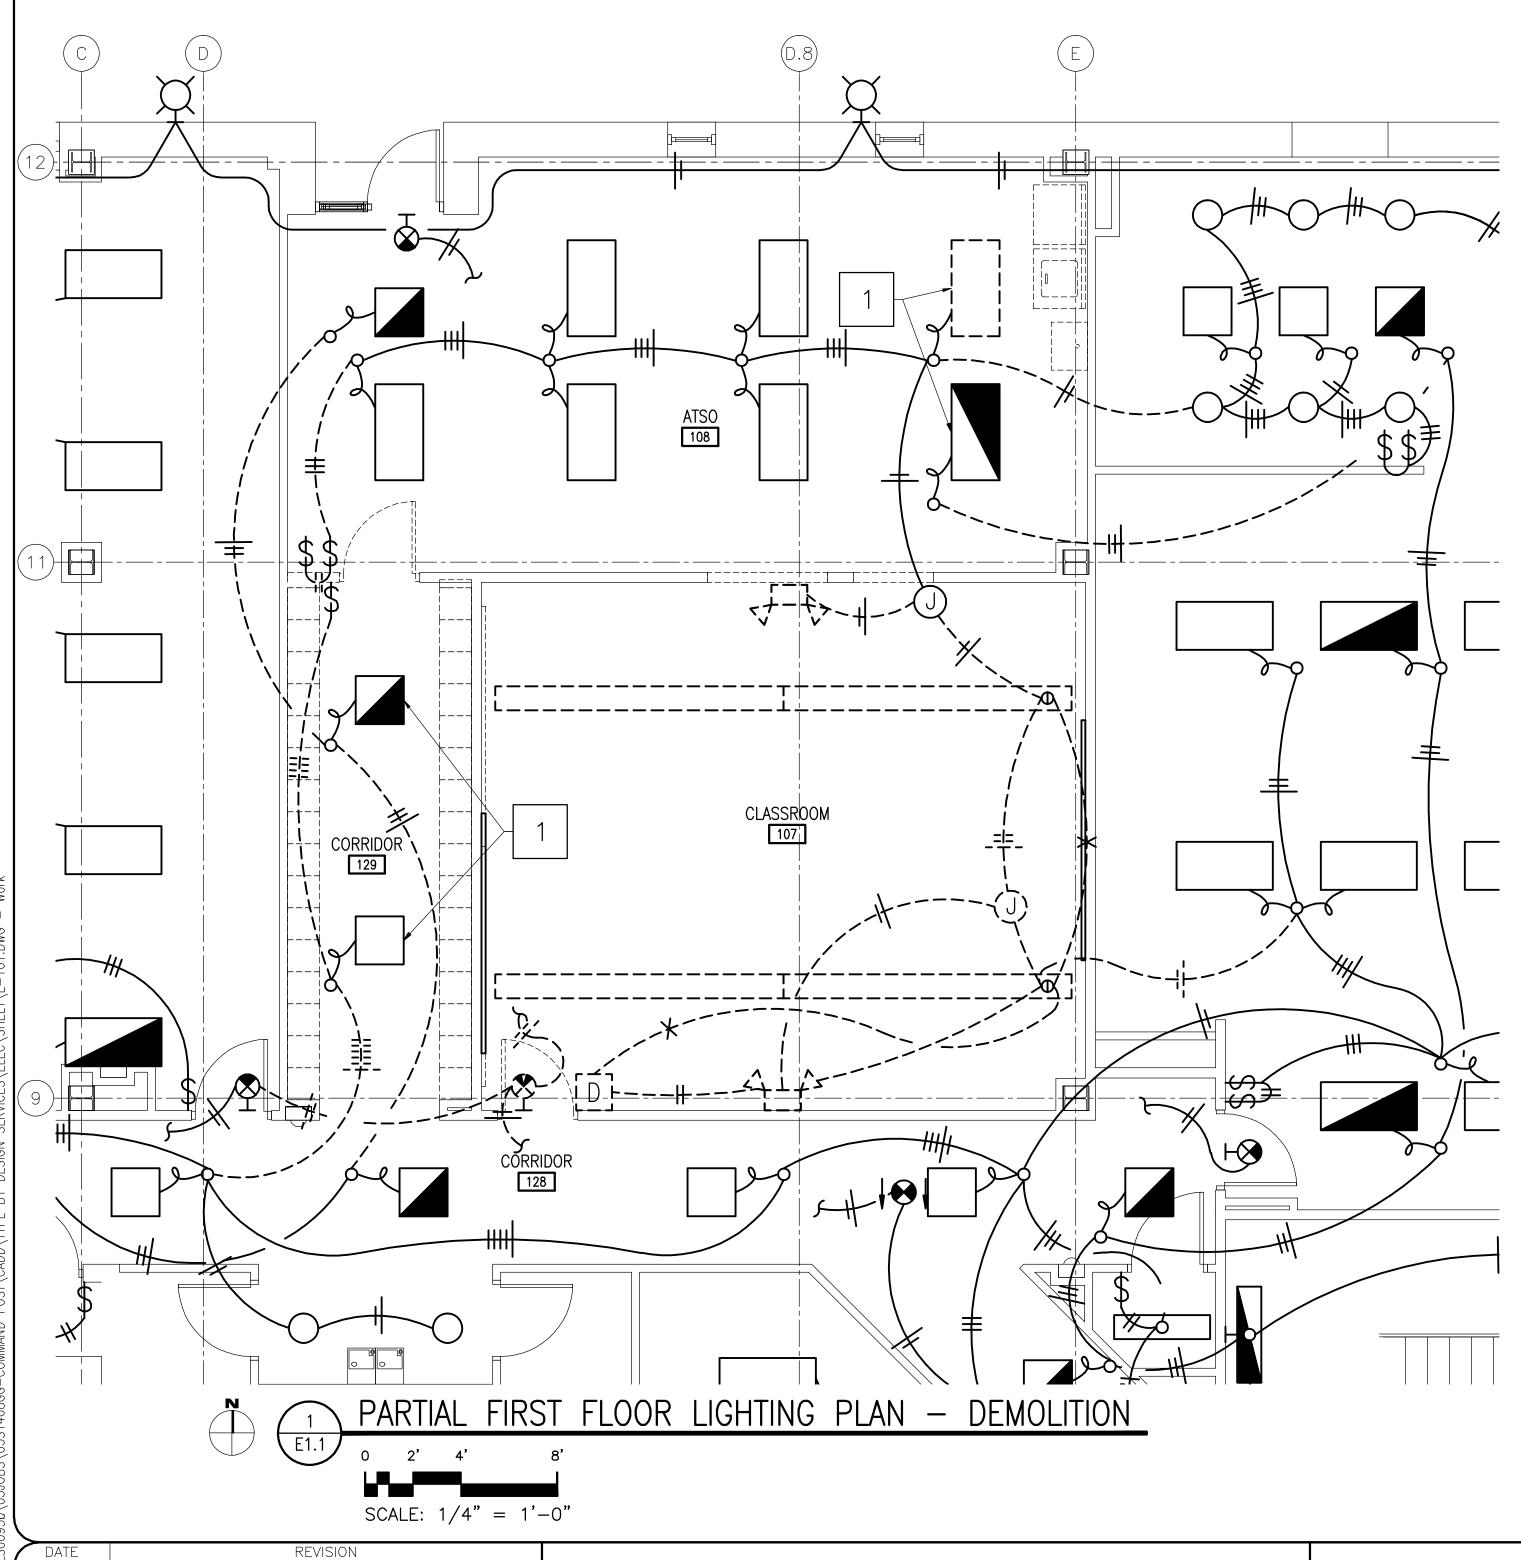


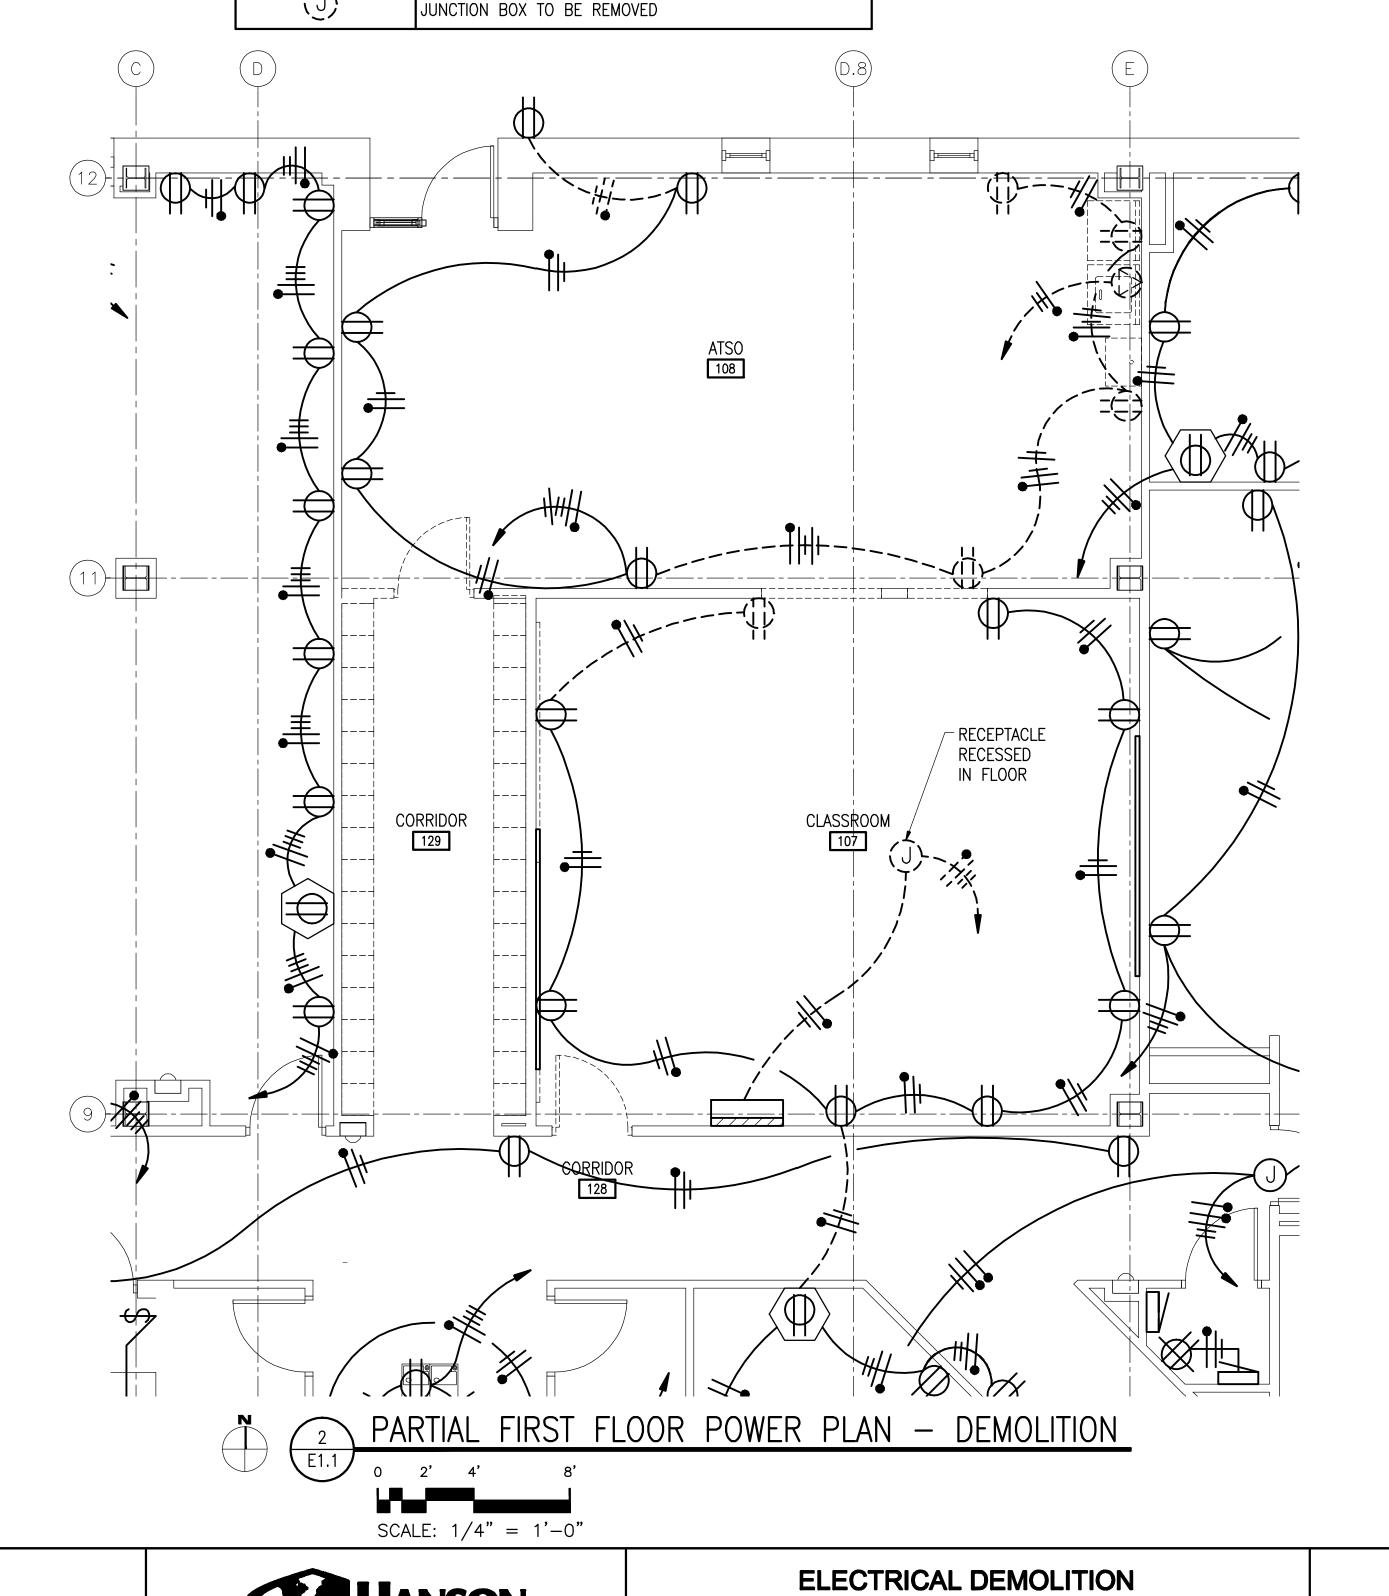



183rd Fighter Wing
Illinois Air National Guard







Copyright Hanson Professional Services Inc. 2009

Hanson Professional Services Inc.

1525 South Sixth Street

Springfield, Illinois 62703-2866

SPRINGFIELD, IL

E1.1

**18** of 22 sheets